

EVC04

Establishing a NEW STANDARD in the commercial refrigeration industry.



Compact Counter top with stainless Steel top, LED, Energy Star rated, ideal for self checkout areas.

LED PERIMETER LIGHTING

LED lighting system, uses a portion of the energy of regular fluorescent lights, and need no replacement for seven years.

HIGH EFFICIENCY GLASS DOORS

"Low-e" double panel argon gas filled glass-pack with an extruded insulated plastic frame, making this door the most energy efficient in its category.

ELECTRONIC TEMPERATURE CONTROLLER


Our controller assures an optimal performance of the cooler, making the product temperature ideal for its consumption.

ELECTRONIC FAN MOTORS

Electronic fan motors allow a better performance, using only a fraction of the energy required by a shaded pole motor.

CYCLOPENTANE INSULATION

CFC and HFC free Cyclopentane foam is eco-friendly and a high efficiency insulator.

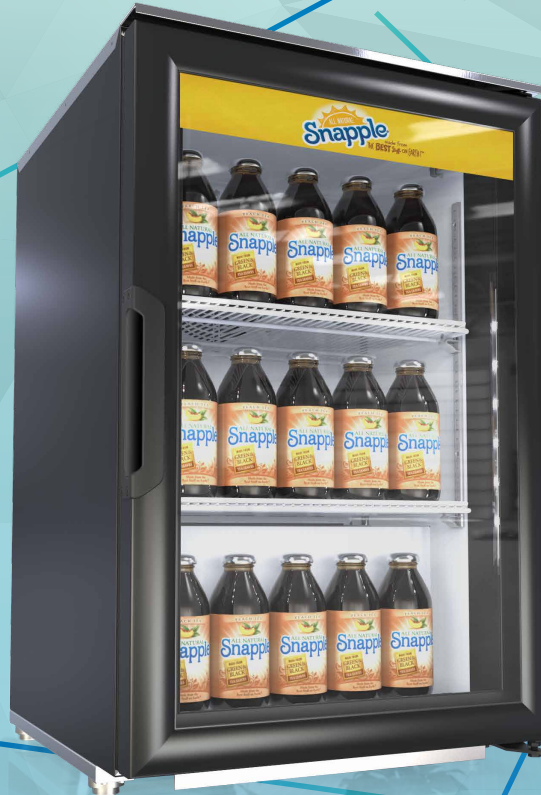

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H:	32 3/4"	830 mm
	W:	21 1/4"	540 mm
	D:	23 7/8"	608 mm
Interior Dimensions	H:	28 5/8"	726 mm
	W:	18"	458 mm
	D:	18 3/4"	476 mm
Dimensions w/packaging	H:	35"	890 mm
	W:	23 5/8"	600 mm
	D:	25 1/4"	640 mm
Shelf Size	W:	17 3/8"	440 mm
	D:	12 5/8"	320 mm
Weight		114.6 lb	52.0 kg
Weight w/packaging		123.5 lb	56.0 kg
Shelves		2	
Capacity 20 oz	Flat	60	

REFRIGERATION DATA

Energy Consumption (kWh/24h)	1.454 kWh/day
Voltage	115/60
Horse power	1/10
AMPS	2.4


LOGISTIC

Trailer Loads	40':	120
	53':	160

Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

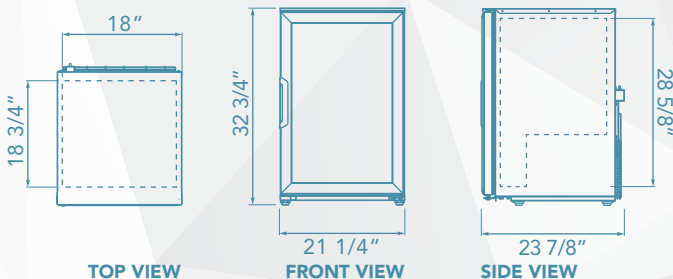

IMBERA USA L.L.C.

245 TownPark Drive Suite 145

Kennesaw, GA 30144

www.imberacooling.com