

VR06

Establishing a NEW STANDARD in the commercial refrigeration industry.



Compact Counter top with stainless Steel top, LED, Energy Star rated, ideal for self checkout areas.

LED LIGHTING SYSTEM

Our new brighter 220+ Luxes LED lighting uses a fraction of the energy of regular fluorescent lights.

HIGH EFFICIENCY GLASS DOOR

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer useful life fan motor.

ELECTRONIC TEMPERATURE CONTROLLER

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

CYCLOPENTANE INSULATION

Eco-friendly, recyclable and high efficiency cabinet insulation.



TECHNICAL SPECIFICATIONS

External Dimensions	H:	36 1/4"	921 mm
	W:	21 1/4"	540 mm
	D:	27 3/4"	704 mm
Internal Dimensions	H:	31 3/4"	807 mm
	W:	18"	456 mm
	D:	21 3/4"	554 mm
Dimensions w/packaging	H:	36 1/4"	921 mm
	W:	23 1/4"	590 mm
	D:	29 7/8"	760 mm
Shelf Size (small)	W:	17 3/4"	450 mm
	D:	6 1/8"	157 mm
Shelf Size (regular)	W:	17 1/8"	435 mm
	D:	17 3/8"	440 mm
Weight		126.8 lb	57.5 kg
Weight w/packaging		130.7 lb	59.3 kg
Shelves		3	
Capacity 20 oz	Flat	84	

REFRIGERATION DATA

Energy Consumption (kWh/24h)	1.740 kWh/day
Voltage	115/60
Horse power	1/8
AMPS	2.5


LOGISTIC

Trailer Loads	40':	120
	53':	160

Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

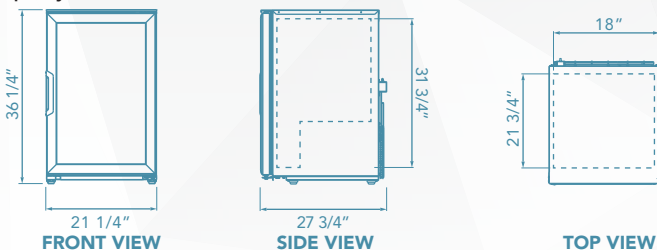

IMBERA USA L.L.C.

245 TownPark Drive Suite 145

Kennesaw, GA 30144

www.imberacooling.com