

Establishing a NEW STANDARD in the commercial refrigeration industry.

A classic with a new spin:  
the VR09 CLASSIC was created to  
evoke the original, classic Coke design  
but features innovative new technology.



## KEY FEATURES



### ELECTRONIC TEMPERATURE CONTROLLER

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.



### REFRIGERANT GASES HC

Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer useful life fan motor.



### ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer useful life fan motor.



### HIGH EFFICIENCY GLASS DOOR

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.



### LED LIGHTING SYSTEM

Our new brighter 220+ Luxes LED lighting uses a fraction of the energy of regular fluorescent lights.



### CYCLOPENTANE INSULATION

Eco-friendly, recyclable and high efficiency cabinet insulation.




### ENERGY SAVINGS

Meets MEC, Energy Star 3.0 and DOE 2017.




CAUTION. Risk of fire or explosion.  
This equipment uses highly flammable  
refrigerant HC. Do not drill pipe cooling system.


# VR09 CLASSIC



TOP VIEW

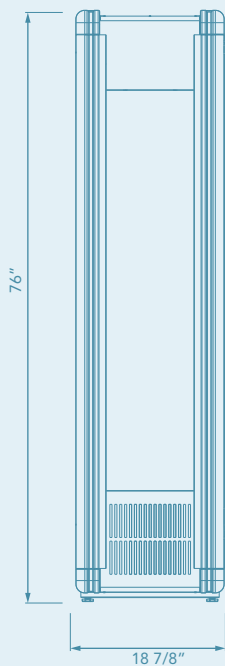

FRONT VIEW

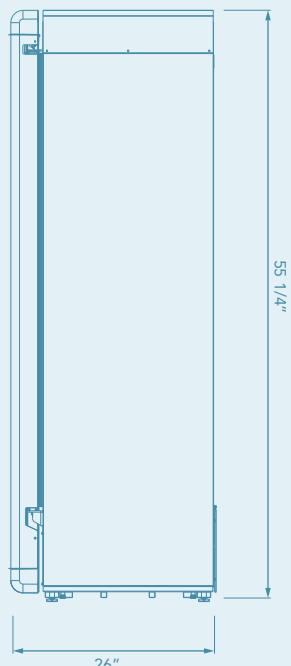

SIDE VIEW

## TECHNICAL SPECIFICATIONS

<b>External Dimensions</b>	H:	76"	1930 mm
	W:	18 7/8"	481 mm
	D:	26"	659 mm
<b>Internal Dimensions</b>	H:	55 1/4"	1402 mm
	W:	15 3/4"	400 mm
	D:	20 1/4"	515 mm
<b>Weight</b>	Crated:	256.6 lb	116.4 kg
<b>Volume</b>		10.2 ft <sup>3</sup>	288.8 lts
<b>Doors</b>		1	
<b>Shelves</b>		5	
<b>20 oz bottle capacity</b>	Total:		150

## REFRIGERATION DATA

<b>Refrigerant</b>	R290
<b>Evaporator</b>	Dynamic
<b>Temp range</b>	32°F to 44.6°F

## ELECTRICAL DATA

<b>Volts (V)</b>	115
<b>Frequency (Hz)</b>	60
<b>Lighting</b>	LEDs Kendy
<b>Cord Length</b>	118" 3000 mm
<b>Plug type</b>	NEMA 5-15P



\* Energy consumption based on ANSI/ASHRAE 72-2005

BMAD System (Low maintenance high performance).  
Dimensions rounded up to the nearest inch or millimeter.  
Specifications subject to change without notice.



IMBERA USA L.L.C.

245 TownPark Drive Suite 145  
Kennesaw, GA 30144

[www.imberacooling.com](http://www.imberacooling.com)