


# VRD43

Establishing a NEW STANDARD in the commercial refrigeration industry.



Full size, LED, Energy Star rated, large capacity double door cooler.

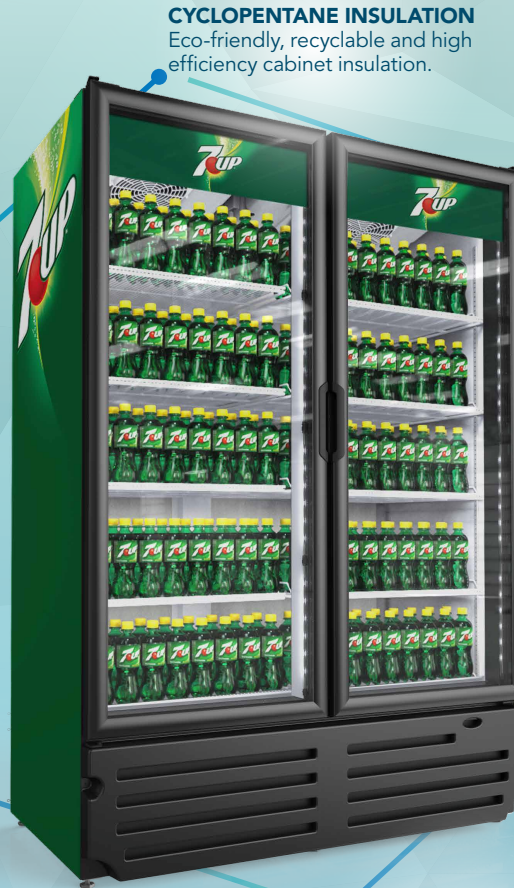

**CYCLOPENTANE INSULATION**  
Eco-friendly, recyclable and high efficiency cabinet insulation.

**LED PERIMETER LIGHTING**  
LED lighting system, uses a portion of the energy of regular fluorescent lights, and need no replacement for seven years.

**ELECTRONIC FAN MOTORS**  
Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer useful life fan motor.



**ELECTRONIC TEMPERATURE CONTROLLER**  
Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

**HIGH EFFICIENCY GLASS DOOR**  
Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

**PLASTIC FRONT GRILL**  
Its differentiated and modern design provides superior impact resistance and is easy to remove for condenser maintenance.

## TECHNICAL SPECIFICATIONS

<b>External Dimensions</b>	H:	78 5/8"	1997 mm
	W:	54 1/8"	1375 mm
	D:	29 3/4"	756 mm
<b>Internal Dimensions</b>	H:	59 5/8"	1515 mm
	W:	50"	1270 mm
	D:	24 7/8"	633 mm
<b>Dimensions w/packaging</b>	H:	82 1/2"	2097 mm
	W:	56 1/2"	1434 mm
	D:	798"	798 mm
<b>Shelf Size</b>	W:	24 1/4"	615 mm
	D:	19 3/4"	501 mm
<b>Weight</b>		482.8 lb	219.0 kg
<b>Weight w/packaging</b>		501.8 lb	227.6 kg
<b>Shelves</b>		10	
<b>Capacity 20 oz</b>	Flat	560	
	Gravity	560	



## REFRIGERATION DATA

<b>Energy Consumption (kWh/24h)</b>	5.506 kWh/day
<b>Voltage</b>	115/60
<b>Horse power</b>	1/2
<b>AMPS</b>	10.7

## LOGISTIC

<b>Trailer Loads</b>	40':	24
	53':	30
<b>Certifications</b>	UL:	✓
	ES:	✓
	UL/EPH:	✓

\* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).  
Dimensions rounded up to the nearest inch or millimeter.  
Specifications subject to change without notice.

IMBERA USA L.L.C.

245 TownPark Drive Suite 145

Kennesaw, GA 30144

[www.imberacooling.com](http://www.imberacooling.com)