

# VR10

Establishing a NEW STANDARD in the commercial refrigeration industry.



Small single door cooler, LED, Energy Star rated, maximizes product packout.

## ELECTRONIC TEMPERATURE CONTROLLER

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

## LED LIGHTING SYSTEM

Our new brighter 220+ Luxes LED lighting uses a fraction of the energy of regular fluorescent lights.

## LOW MAINTENANCE CONDENSER

Imbera's finless condenser designed to minimize maintenance. Drastically reduces Total Cost of Ownership. Prevents dust that blocks air flow, to save energy and extend the life of the compressor.

## ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer useful life fan motor.

## CYCLOPENTANE INSULATION


Eco-friendly, recyclable and high efficiency cabinet insulation.

## HIGH EFFICIENCY GLASS DOOR

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

## PLASTIC FRONT GRILL

Its differentiated and modern design provides superior impact resistance and is easy to remove for condenser maintenance.

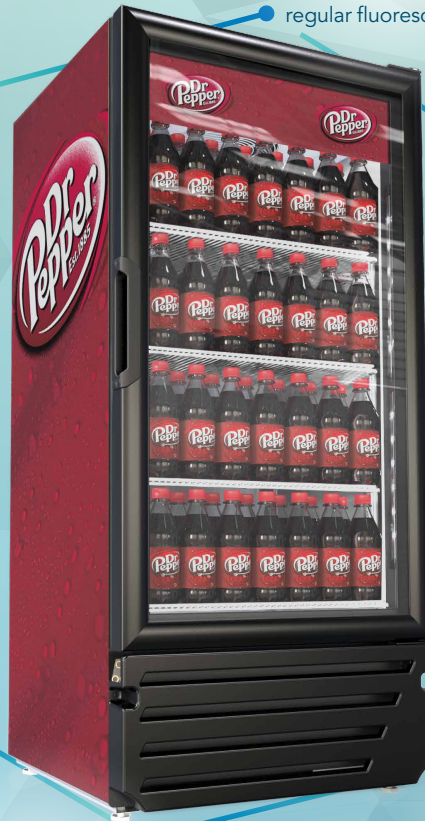

## TECHNICAL SPECIFICATIONS

<b>External Dimensions</b>	H:	53 3/4"	1365 mm
	W:	24 7/8"	632 mm
	D:	23 1/4"	590 mm
<b>Internal Dimensions</b>	H:	39 7/8"	1013 mm
	W:	21 7/8"	555 mm
	D:	18 5/8"	472 mm
<b>Dimensions w/packaging</b>	H:	57 5/8"	1464 mm
	W:	27 1/4"	693 mm
	D:	25"	636 mm
<b>Shelf Size</b>	W:	20 7/8"	530 mm
	D:	17 3/8"	440 mm
<b>Weight</b>		166.4 lb	75.2 kg
<b>Weight w/packaging</b>		180.1 lb	81.7 kg
<b>Shelves</b>		3	
<b>Capacity 20 oz</b>	Flat	126	

## REFRIGERATION DATA


<b>Energy Consumption (kWh/24h)</b>	2.167 kWh/day
<b>Voltage</b>	115/60
<b>Horse power</b>	1/8
<b>AMPS</b>	2.3

## LOGISTIC

<b>Trailer Loads</b>	40':	54
	53':	80
<b>Certifications</b>	UL:	✓
	ES:	✓
	UL/EPH:	✓

\* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).  
Dimensions rounded up to the nearest inch or millimeter.  
Specifications subject to change without notice.

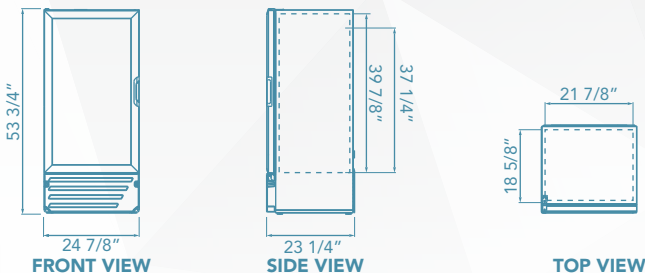

IMBERA USA L.L.C.

245 TownPark Drive Suite 145

Kennesaw, GA 30144

[www.imberacooling.com](http://www.imberacooling.com)