Imbera Foodservice

VRD21

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

THIS HIGH ENERGY EFFICIENT **TWO DOOR** COOLER IS IDEAL FOR **REDUCED SPACES**.

KEY FEATURES

- **BMAD Refrigeration System**
  Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

- **Electronic Temperature Controller**
  Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

- **High Efficiency Glass Door**
  Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

- **LED Lighting System**
  Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

- **CFC and HFC Free Cyclopentane Foam**
  Eco-friendly, recyclable and high efficiency cabinet insulation.

- **Electronic Fan Motors**
  Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.

- **Low Maintenance Condenser**
  Imbera's finless condenser designed to minimize maintenance. Drastically reduces Total Cost of Ownership. Prevents dust that blocks air flow, to save energy and extend the life of the compressor.

IMBERA FOODSERVICE | 245 Townpark Drive, Suite 145
Kennesaw, GA 30144 | **Ph:** 678 - 504 - 6835 | **info@imberafoodservice.com**

Imbera Foodservice

VRD21

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

PRODUCT VIEWS



TOP VIEW

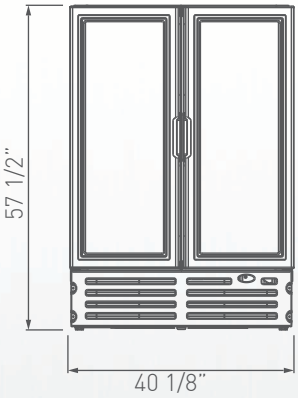

FRONT VIEW

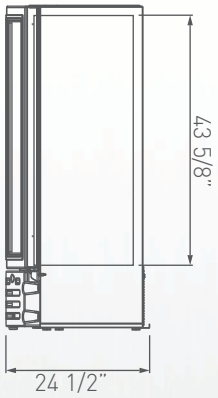

SIDE VIEW

Warranty:
Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

Exterior Dimensions	**W:**	40 1/8"	1020 mm
	D:	24 1/2"	622 mm
	H:	57 1/2"	1462 mm
Interior Dimensions	**W:**	36 1/8"	919 mm
	D:	16 3/4"	423 mm
	H:	43 5/8"	1108 mm
Dimensions w/packaging	**W:**	41 5/8"	1058 mm
	D:	26 1/2"	672 mm
	H:	61 1/2"	1562 mm
Shelf Size	**W:**	35 3/8"	898 mm
	D:	14 3/4"	374 mm
Weight		259.7 Lbs	117.8 kg
Weight w/packaging		275.6 Lbs	125.0 kg
Shelves	4		
Capacity 20oz.	**Flat:**	180	
	Gravity:	165	

REFRIGERATION DATA

Energy Consumption	2.645 kWh/day
Voltage	115/60
Horse Power	1/6
AMPS	3.6

LOGISTIC

Trailer Loads	40':	33
	53':	44
Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.