

G319

Establishing a NEW STANDARD in the commercial refrigeration industry.



Large single door cooler, LED + Backlight, Energy Star rated, our most popular unit.

LED LIGHTING SYSTEM

Our new brighter 220+ Luxes LED lighting uses a fraction of the energy of regular fluorescent lights.

PLASTIC FRONT GRILL

Its differentiated and modern design provides superior impact resistance and is easy to remove for condenser maintenance.

HIGH EFFICIENCY GLASS DOOR

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

LOW MAINTENANCE CONDENSER

Imbera's finless condenser designed to minimize maintenance. Drastically reduces Total Cost of Ownership. Prevents dust that blocks air flow, to save energy and extend the life of the compressor.

ELECTRONIC FAN MOTORS


Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer useful life fan motor.

ELECTRONIC TEMPERATURE CONTROLLER

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.



CYCLOPENTANE INSULATION

Eco-friendly, recyclable and high efficiency cabinet insulation.

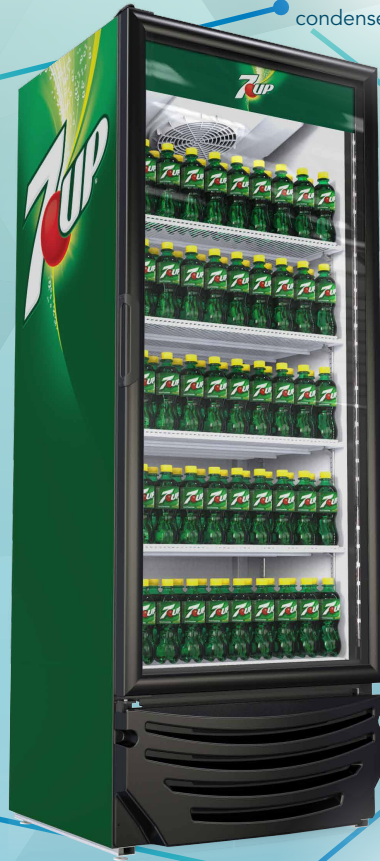

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H:	78 3/4"	2000 mm
	W:	29 1/2"	750 mm
	D:	27 1/2"	700 mm
Interior Dimensions	H:	60 1/2"	1536 mm
	W:	25 1/2"	649 mm
	D:	21 3/8"	542 mm
Dimensions w/packaging	H:	82 5/8"	2100 mm
	W:	32 1/4"	820 mm
	D:	29 7/8"	760 mm
Shelf Size	W:	24 3/4"	630 mm
	D:	19 5/8"	497 mm
Weight		114.6 lb	52.0 kg
Weight w/packaging		123.5 lb	56.0 kg
Shelves		5	
Capacity 20 oz	Flat	240	



REFRIGERATION DATA

Energy Consumption (kWh/24h)	3.040 kWh/day
Voltage	115/60
Horse power	1/4+
AMPS	5.2

LOGISTIC

Trailer Loads	40':	42
	53':	60
Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

IMBERA USA L.L.C.

245 TownPark Drive Suite 145

Kennesaw, GA 30144

www.imberacooling.com